


AD-A049 137

DEFENCE RESEARCH ESTABLISHMENT SUFFIELD RALSTON (ALBERTA) F/G 14/2
DESIGN OF A COMPACT PLENUM CHAMBER FOR SUPPLY OF AIR TO AN ANNU--ETC(U)
DEC 77 D A BAYLY
DRES-TN-417

UNCLASSIFIED

NL

| OF |
AD
AD49137

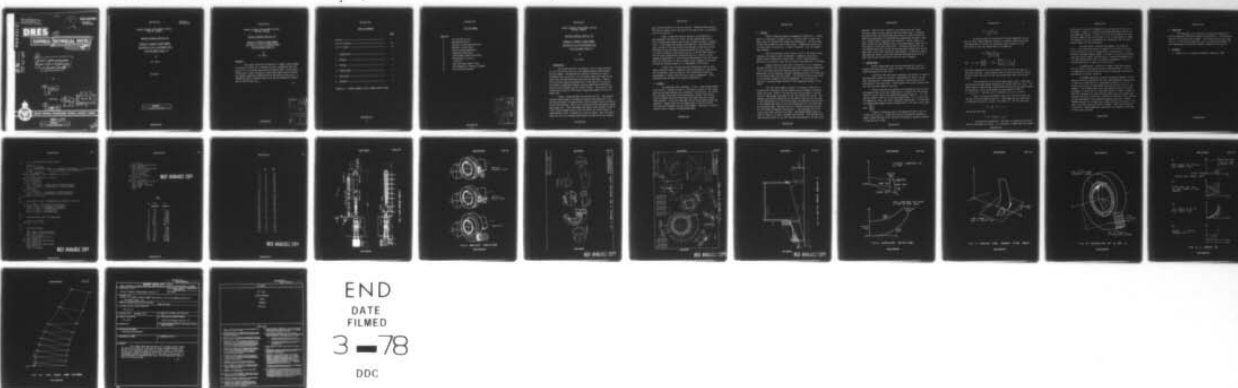

END
DATE
FILMED
3 - 78
DDC

AD A049137

AD No.

DDC FILE COPY

NTIS REPRODUCTION
BY PERMISSION OF
INFORMATION CANADA

UNCLASSIFIED

UNLIMITED
DISTRIBUTION

DRES

SUFFIELD TECHNICAL NOTE

(14) DRES-TN-417

(6)
DESIGN OF A COMPACT PLENUM CHAMBER
FOR SUPPLY OF AIR TO AN ANNULAR SPACE
WITH LOW ENERGY LOSSES.

by

(10)
D.J.A. Bayly

PCN 21K01

(11)
December 1977

(12) 31 p.

DDC
RECEIVED
JAN 27 1978
A



DEFENCE RESEARCH ESTABLISHMENT SUFFIELD : RALSTON : ALBERTA

403 104

WARNING

The use of this information is permitted subject to recognition
of proprietary and patent rights.

y/b

UNCLASSIFIED

UNLIMITED
DISTRIBUTION

DEFENCE RESEARCH ESTABLISHMENT SUFFIELD
RALSTON ALBERTA

SUFFIELD TECHNICAL NOTE NO. 417

DESIGN OF A COMPACT PLENUM CHAMBER
FOR SUPPLY OF AIR TO AN ANNULAR SPACE
WITH LOW ENERGY LOSSES (U)

by

D.A. Bayly

PCN 21K01

WARNING

The use of this information is permitted subject to recognition
of proprietary and patent rights".

UNCLASSIFIED

UNCLASSIFIED

DEFENCE RESEARCH ESTABLISHMENT SUFFIELD
RALSTON ALBERTA

SUFFIELD TECHNICAL NOTE NO. 417

DESIGN OF A COMPACT PLENUM CHAMBER
FOR SUPPLY OF AIR TO AN ANNULAR SPACE
WITH LOW ENERGY LOSSES (U)

by
D.A. Bayly

ABSTRACT

This report describes the design of a compact plenum chamber the function of which is to receive air from a rectangular duct and deliver it to an annular space with low energy losses. Turning vanes formed from a single thickness of sheet steel ensure that air leaves the chamber essentially perpendicular to the plane of the annulus. A FORTRAN program is presented which plots the two dimensional development of the turning vane.

(U)

UNCLASSIFIED

ACCESSION No.	
TYPE	Write Section <input checked="" type="checkbox"/>
DDG	Buy Section <input checked="" type="checkbox"/>
UNCLASSIFIED	<input type="checkbox"/>
JUSTIFICATION	
HT	
RESTRICTION/AVAILABILITY INDEX	
DATE	AVAIL. DATE/RE SPECIAL
A	

UNCLASSIFIED

TABLE OF CONTENTS

	<u>Page</u>
Abstract -----	i
Table of Contents -----	ii
List of Figures -----	iii
1. INTRODUCTION -----	1
2. APPROACH -----	2
3. FEATURES -----	3
4. TURNING VANES -----	4
5. CONCLUSION -----	7
6. REFERENCE -----	7

APPENDIX A - FORTRAN PROGRAM TO PLOT TURNING VANE PATTERN

UNCLASSIFIED

UNCLASSIFIED

LIST OF FIGURES

Figure No.

- 1 Film Cooling Facility
- 2 Manifold Variations
- 3 Manifold II and Associated Parts
- 4 Manifold II Outer Shell
- 5 Section Through Manifold II
- 6 Coordinate Definitions
- 7 Leading Edge Tangent Plane Angle
- 8 Calculation of V_a and V_t
- 9 z versus $\bar{r}\theta$
- 10 Inner and Outer Edges of Vane
- 11 Vane Composed of Triangular Elements
- 12 Full Scale Vane Pattern

ACCESSION #	
RTIS	Water Section <input type="checkbox"/>
DAI	Unit Section <input type="checkbox"/>
DAI	Unit Section <input type="checkbox"/>
DISTINCTION/AVAILABILITY CODES	
DIST	AVAIL. USE OR SPECIAL

UNCLASSIFIED

UNCLASSIFIED

DEFENCE RESEARCH ESTABLISHMENT SUFFIELD
RALSTON ALBERTA

SUFFIELD TECHNICAL NOTE NO. 417

DESIGN OF A COMPACT PLENUM CHAMBER
FOR SUPPLY OF AIR TO AN ANNULAR SPACE
WITH LOW ENERGY LOSSES (U)

by

D.A. Bayly

1. INTRODUCTION

This report describes the design of an air supply manifold for the film cooling facility at the Defence Research Establishment Suffield (DRES). The manifold was required to receive air from a rectangular duct and deliver it to an annular space with lower energy losses than had been experienced with previous manifolds. Ideally, velocity vectors would be perpendicular to the plane of the annulus and uniform in magnitude; however, devices downstream of the annulus could be used to smooth out the velocity profile. The essence of the problem was to move air efficiently through what added up to be a 90 degree turn.

Figure 1 shows the DRES Film Cooling Facility. The Orenda 8 turbojet engine draws air through an intake on the south side of the building and expels hot exhaust gases into the exhaust duct on the north side of the building. Excess gas is diverted by the continuously adjustable bypass unit. After the bypass the exhaust flows through 24 feet of 2-foot inside diameter pipe to the film cooled test section which is approximately 2 feet in diameter by 2 feet in length. The 15 HP centrifugal fan drives air through approximately 40 feet of 20-inch diameter

UNCLASSIFIED

duct, and the manifold, to the test section. Convective heat transfer from the hot exhaust gas to the walls of the test section is reduced by the film of cool air.

Figure 2 shows the original manifold, called Manifold I, with tangential and radial air entry, and the improved Manifold II. The film cooled test section and cooling air duct are shown in phantom lines. It was found that systems using Manifold I had unsatisfactory total cooling air flow and velocity distribution in the test section. Efficiency of the air supply system was defined as P_v/P_{FT} where P_v is velocity pressure at the annulus and P_{FT} is the fan total pressure. This ratio was experimentally determined to be 4 - 28% for various systems using Manifold I. Data revealed that Manifold I was the largest source of inefficiency in the air supply system. Redesign of the manifold had the greatest potential for improvement of efficiency.

A lower entry velocity and more streamlined interior would reduce turbulent losses. Tangential velocity components at the annular exit of Manifold I were not good for film cooling and it would be advantageous to convert them into axial velocity components. These guidelines were followed in the design of Manifold II.

2. APPROACH

Two approaches were considered. First, a large plenum chamber could be used. The path of the air from entry to outlet of the chamber would not be known precisely but, because of low velocities, low resistance and good distribution could be expected. Second, the manifold could be compact and direct relatively high speed flows over streamlined surfaces. It was not known what size of large plenum chamber was necessary. Support posts for the exhaust duct in the film cooling facility would interfere with any large chamber. Therefore, it was decided to build a compact, streamlined manifold.

3. FEATURES

Figure 3 shows the general arrangement of Manifold II. Further detail is contained in Figures 4 and 5. The inner shell is made from sheet steel to withstand high exhaust gas temperatures. The outer shell is made from plywood for ease of fabrication. Temperatures occurring in the outer shell are quite low. A layer of fiberglass over the plywood adds strength.

The cross-sectional area of the air inlet is 144 square inches, compared to 64 square inches for Manifold I tangential entry and 91 square inches for Manifold I radial entry. The air inlet velocity to Manifold II is therefore lower than to either of the Manifold I variations.

Between inner and outer shells of Manifold II is a trapezoidal passage (Figure 5) the cross-sectional area of which decreases proportionally to the angle travelled around the manifold. Constant velocity is maintained in the trapezoidal passage by decreasing area as air bleeds off to the turning vanes and test section. The function of the turning vanes is to eliminate tangential velocity components. All the vanes are identical in design because velocity in the trapezoidal passage is constant.

The inner shell shown in Figure 5 is conical so that most of the manifold is separated from the exhaust pipe by fiberglass insulation and/or air space. Width of the turning vane trailing edge is fixed by choice of the maximum slot width for the film cooled test section. Preliminary calculations showed that if the width of the vane was the same at the leading edge as at the trailing edge, the effective cross-sectional area between the vanes at the trailing edge would be 3.28 times that at the leading edge. When the walls of a diffuser diverge too quickly, air flow tends to separate from the walls. Flow separation will also occur on the inner surface of an elbow. The passage between vanes, as shown in Figure 3, is both a diffuser and an elbow. Thus the ideal uniform velocity profile at the exit from the vane passage is unlikely to be

achieved. There will be a region of low velocity near the "inner" vane and a region of high velocity near the "outer" vane. Increasing the width of the vane leading edge would tend to relieve the velocity profile problem because it would make the passage less divergent. However, another factor complicates the situation. Figure 5 shows that after leaving the vane passage, the air must make another slight turn to flow parallel to the test section wall. Increasing the width of the vane leading edge would increase the average angle through which the air would have to turn when leaving the vane passage. A compromise leading edge width was chosen so that the previously mentioned area ratio became 2.68 and the turning angle at vane exit was 19 degrees.

4. TURNING VANES

Airfoil shaped vanes would be most desirable but casting or forging facilities were not readily available. Vanes were bent from single thicknesses of sheet steel.

Cylindrical and rectilinear coordinates are defined in Figure 6. The theoretical surface of the vane is generated by a radial line segment, the generatrix, simultaneously rotating in the θ direction and translating in the z -direction. Intersections with conical surfaces form the inner and outer edges of the vane.

Energy losses due to turbulence are minimized by ensuring that the tangent plane to the vane leading edge is coplanar with the velocity vector of the air leaving the trapezoidal passage (Figure 7). V is the velocity vector of the air at the vane leading edge. V_t , V_a and V_r are its tangential, axial, and radial components respectively. In order that the leading edge tangent plane be coplanar with V , the angle β must equal

$$\tan^{-1} \left[\frac{V_a}{V_t} \right].$$

Figure 8 illustrates some of the quantities used in the calculation of V_a and V_t . Volume flow rate into the manifold through A_0 equals volume flow rate out of the manifold through A_1 assuming constant air density and no leaks.

$$V_a = \frac{Q}{\pi(r_{10}^2 - r_1^2)}$$

By the principle of conservation of angular momentum, the product of radius times tangential velocity is constant, neglecting change in momentum due to friction and turbulence losses; hence V_t at the mean radius of the vane leading edge is estimated as

$$V_t = \frac{Q}{A_0} \frac{r_0}{\left(\frac{r_1 + r_{10}}{2}\right)}$$

$$\text{Thus } \beta = \tan^{-1} \left[\frac{V_a}{V_t} \right] = \tan^{-1} \left[\frac{A_0(r_1 + r_{10})}{2\pi(r_{10}^2 - r_1^2)r_0} \right].$$

Note that β depends only on the geometry of the manifold and does not vary with flow rate. Using average values of radius and velocity results in small errors for points on the vane leading edge other than the mid-point.

The orientation of the leading edge tangent plane is now known, and the trailing edge tangent plane must be coplanar with the z axis. The scheme chosen to describe the curved surface joining the two tangent planes is a curve of z versus the $\bar{r}\theta$ product as constructed in Figure 9.

$\bar{r} = \frac{(r_1 + r_{10})}{2}$. From the curve is obtained a set of (θ, z) pairs.

Next, r values are attached to the (θ, z) pairs for points on the inner and outer edges of the vane. These edges are the intersection of the vane with conical surfaces. See Figure 10. For the inner edge,

$$r = r_1 - \frac{z}{z_9} (r_1 - r_9)$$

and for the outer edge

$$r = r_{10} - \frac{z}{z_9} (r_{10} - r_{18}).$$

As explained by Reference 1, the vane is a warped surface which cannot be developed on a plane. It is necessary to approximate the warped

surface with a series of triangles so the vane can be laid out on a flat sheet. Figure 11 illustrates the three-dimensional vane and its two-dimensional pattern. Points 1 to 18 lie on the theoretical inner and outer edges of the vane and their (r, θ, z) coordinates are known. The lengths of all the line segments are calculated using the Pythagorean theorem for three dimensions.

The flat layout is started with segment 1-10 along the y-axis. Arcs having the lengths of segments 1-11 and 10-11 could be struck from points 1 and 10 respectively to locate point 11. Alternatively, the angle between segments 1-10 and 1-11 could be calculated using the law of cosines, and then point 11 located trigonometrically. The latter method lends itself to computer programming. Point 2 is located after point 11, then point 12 and so on.

A quadrilateral 9-19-20-18 is added to the vane coplanar with the z-axis to help establish flow in that direction. Point 19 is separated 1/4 inch from the inner cone to reduce heat transfer and problems due to thermal expansion.

A FORTRAN program was written following the methods outlined above to calculate coordinates and plot a two-dimensional vane pattern. It requires as input the (θ, z) coordinates of points 1 to 18 inclusive, and the set of point-number pairs for the end points of line segments. The variable definitions and program listing are included as Appendix A, while the full scale vane pattern is shown in Figure 12. Note that the pattern has been reflected about the x-axis because the tangential velocity in the actual manifold is opposite to that imagined for the development of the equations describing the vane. Another FORTRAN program, not included here, plotted the lines of contact of the vane on the inner and outer conical surfaces. These lines aided construction of a three-dimensional vane model, and assembly of the vanes on the conical surfaces.

5. CONCLUSION

Efficiency $\frac{P_v}{P_{FT}}$ of the cooling air system using Manifold II was 0.52 compared to 0.28 for systems using Manifold I. Thus the major objective of the design was achieved. The velocity profile had irregularities in direction and magnitude, but, as previously mentioned, devices downstream of the manifold tended to smooth out the profile.

6. REFERENCE

1. Giesecke et al., Engineering Graphics, Macmillan, 1969.

UNCLASSIFIED

APPENDIX A

FORTRAN PROGRAM TO PLOT TURNING VANE PATTERN

<u>Variable</u>	<u>Definition</u>	<u>Mode</u>	<u>Class</u>
R(N)	radius r to point N (inches)	real	1
TTA(N)	angle θ to point N (degrees)	"	"
Z(N)	height z of point N (inches)	"	"
ALONG (L)	length of line segment L (inches)	"	"
X(N)	x-coordinate of point N in plot	"	"
Y(N)	y-coordinate of point N in plot	"	"
N	point index number	integer	0
L	line segment index number	"	"
N1	point number at beginning of line segment L	"	"
N2	point number at end of line segment L	"	"
ALPHA	angle of line segment L from reference line 1-10 (degrees)	real	"
J	vertex angle index number	integer	"
C	cosine of vertex angle V	real	"
V	vertex angle between two line segments (degrees)	"	"
B	variable to indicate whether J is even or odd	"	"
AB	smaller angle between line segment 9-18 and y-axis (degrees)	"	"
I	index number used to set order of plotting of line segments	integer	"
D	variable to indicate whether I is even or odd	real	"
XX	x-coordinate of final pen position	"	"

UNCLASSIFIED

```

C      TURNING VANE COMPOSED OF TRIANGULAR ELEMENTS
C      DRFSMES      D.A. BAYLY
C      THIRD VERSION
C      FULL SCALE PATTERN OF MANIFOLD II VANES
C
C      DIMENSION R(18),TTA(18),Z(18),ALONG(33),X(20),Y(20)
C
C      READING SET OF (TTA,Z) PAIRS
C
C      DO 9 N = 1,18,1
C      READ(2,100) TTA(N),Z(N)
100  FORMAT (5X,F4.1,5X,F5.3)
C      9 TTA(N) = TTA(N)*3.141593/180.
C
C      CALCULATING R FOR (R,TTA,Z) COORDINATES
C
C      DO 10 N = 1,9,1
C      10 R(N) = 13.568 - .2516*Z(N)
C      DO 20 N = 10,18,1
C      20 R(N) = 16.625 - .4440*Z(N)
C      DO 30 L = 1,33,1
C
C      READING POINT NUMBERS FOR END POINTS OF LINE SEGMENTS
C
C      READ(2,101) N1,N2
101  FORMAT(5X,I3,5X,I3)
C
C      CALCULATING LENGTH OF LINE SEGMENT
C
C      30 ALONG(L) = SQRT(      ( R(N2)*COS(TTA(N2)) - R(N1)*COS(TTA(N1)) )
C      1 **2.  +  ( R(N2)*SIN(TTA(N2)) - R(N1)*SIN(TTA(N1)) ) **2.
C      2  +  ( Z(N2) - Z(N1) ) **2. )
C
C      DEFINING (X,Y) COORDINATES OF FIRST TWO POINTS
C
C      X(1) = 0.
C      Y(1) = 3.057
C      X(10) = 0.
C      Y(10) = 0.
C
C      CALCULATING VERTEX ANGLE BETWEEN SEGMENTS , AND

```

BEST AVAILABLE COPY


```

C      (X,Y) COORDINATES OF NEXT POINT
C
      ALPHA = 0.
      DO 40 J = 1,16,1
      C = ( (ALONG(2*J))**2. - (ALONG(2 *J+1))**2. - (ALONG(2*J-1))
1      **2. ) / ( -2.*(ALONG(2*J+1))*ALONG(2*J-1))
      IF (C) 34,35,35
34 V = 3.141593 + ATAN ((SQRT(1. - C*C))/C)
      GO TO 36
35 V = ATAN ((SQRT(1. - C*C))/C)
36 R = (-1.)*J
      IF(R) 37,37,38
37 N = (J+21) / 2
      X(N) = X(N-10) + (ALONG(2*J+1))*SIN(V-ALPHA)
      Y(N) = Y(N-10) - (ALONG(2*J+1)) *COS(V-ALPHA)
      GO TO 40
38 N = (J+2)/2
      X(N) = X(N+9) + (ALONG(2*J+1))*SIN(V-ALPHA)
      Y(N) = Y(N+9) + (ALONG(2*J+1))*COS(V-ALPHA)
40 ALPHA = V - ALPHA

C
C
C      CALCULATING (X,Y) COORDINATES OF POINTS 19 AND 20
C
41 AR = ATAN( (X(18)-X(9))/(Y(9)-Y(18)) )
      X(20) = X(18) + 2.188*SIN(1.1529-AR)
      Y(20) = Y(18) + 2.188*COS(1.1529-AR)
      X(19) = X(20) - 1.711*SIN(AR)
      Y(19) = Y(20) + 1.711*COS(AR)

C
C
C      PATTERN REFLECTED AND TRANSLATED
C
      DO 46 N = 1,20,1
46 Y(N) = 8. - Y(N)

C
C
C      PLOTTING BEGINS
C
      CALL SCALE (1.0,1.0,0.,0.)
      CALL FPLOT (-2,X(10),Y(10))
      DO 60 N = 1,9,1
      CALL FPLOT(0,X(N),Y(N))
60 CALL POINT(0)
61 CALL FPLOT (0,X(19),Y(19))
      CALL POINT(0)
      CALL FPLOT (0,X(20),Y(20))
      CALL POINT(0)
      DO 70 I = 1,9,1

```

BEST AVAILABLE COPY


```

      N = 19-I
      CALL FPLLOT(0,X(N),Y(N))
70  CALL POINT(0)
      CALL FPLLOT(0,X(1),Y(1))
      DO 80 I = 1,16,1
      D = (-1.)*I
      IF(D) 71,71,72
71  N = 11 + (I-1)/2
      GO TO 80
72  N = (I + 2)/2
80  CALL FPLLOT(0,X(N),Y(N))
      XX = X(20) + 2.
      CALL FPLLOT (1,XX,0.)
      CALL EXIT
      END

```

BEST AVAILABLE COPY

DATA

N	TTA (Degrees)	Z (Inches)
1	0.	0.
2	2.	.175
3	4.	.380
4	6.	.625
5	8.	.920
6	10.	1.295
7	12.	1.820
8	14.	2.670
9	15.	4.000
10	0.	0.
11	1.	.085
12	3.	.275
13	5.	.495
14	7.	.770
15	9.	1.095
16	11.	1.540
17	13.	2.175
18	15.	4.000

UNCLASSIFIED

A-5

L	N1	N2
1	1	10
2	10	11
3	1	11
4	1	2
5	2	11
6	11	12
7	2	12
8	2	3
9	3	12
10	12	13
11	3	13
12	3	4
13	4	13
14	13	14
15	4	14
16	4	5
17	5	14
18	14	15
19	5	15
20	5	6
21	6	15
22	15	16
23	6	16
24	6	7
25	7	16
26	16	17
27	7	17
28	7	8
29	8	17
30	17	18
31	8	18
32	8	9
33	9	18

BEST AVAILABLE COPY

UNCLASSIFIED

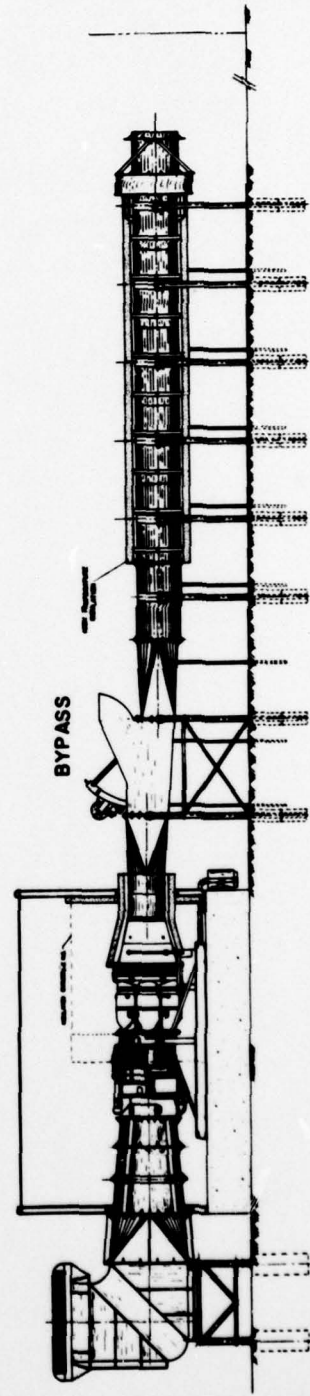
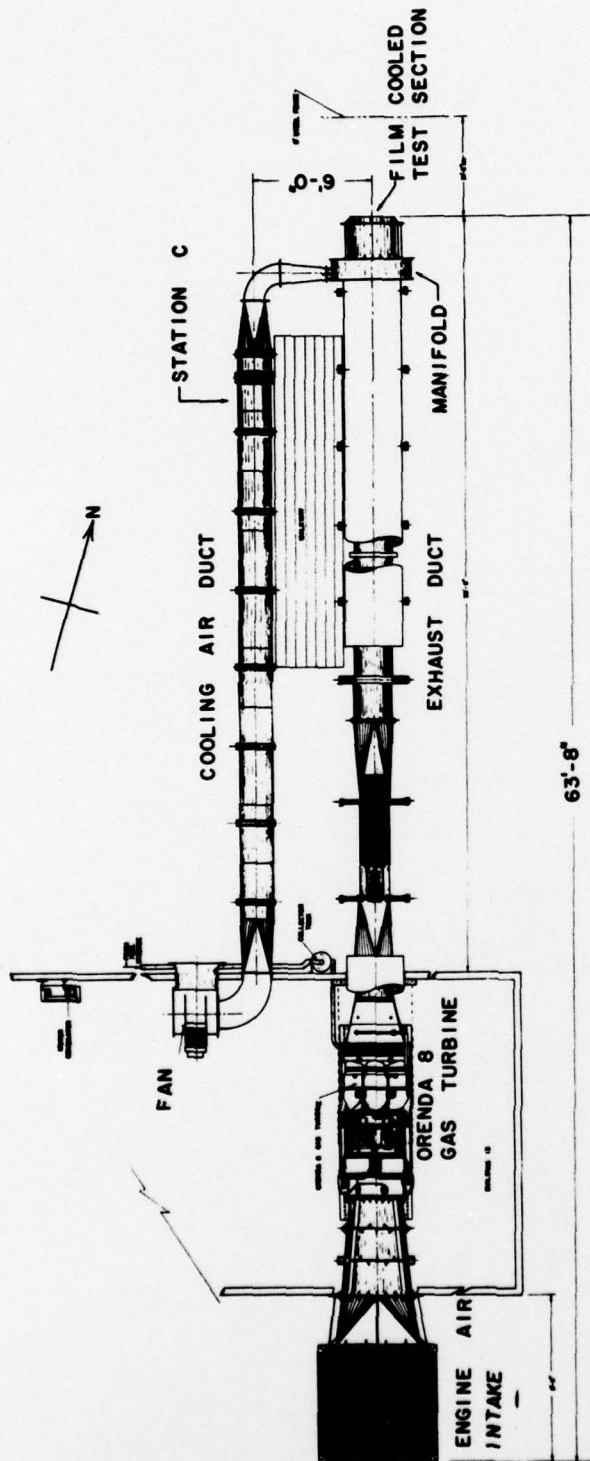


FIG. 1 FILM COOLING FACILITY

UNCLASSIFIED

STN 417


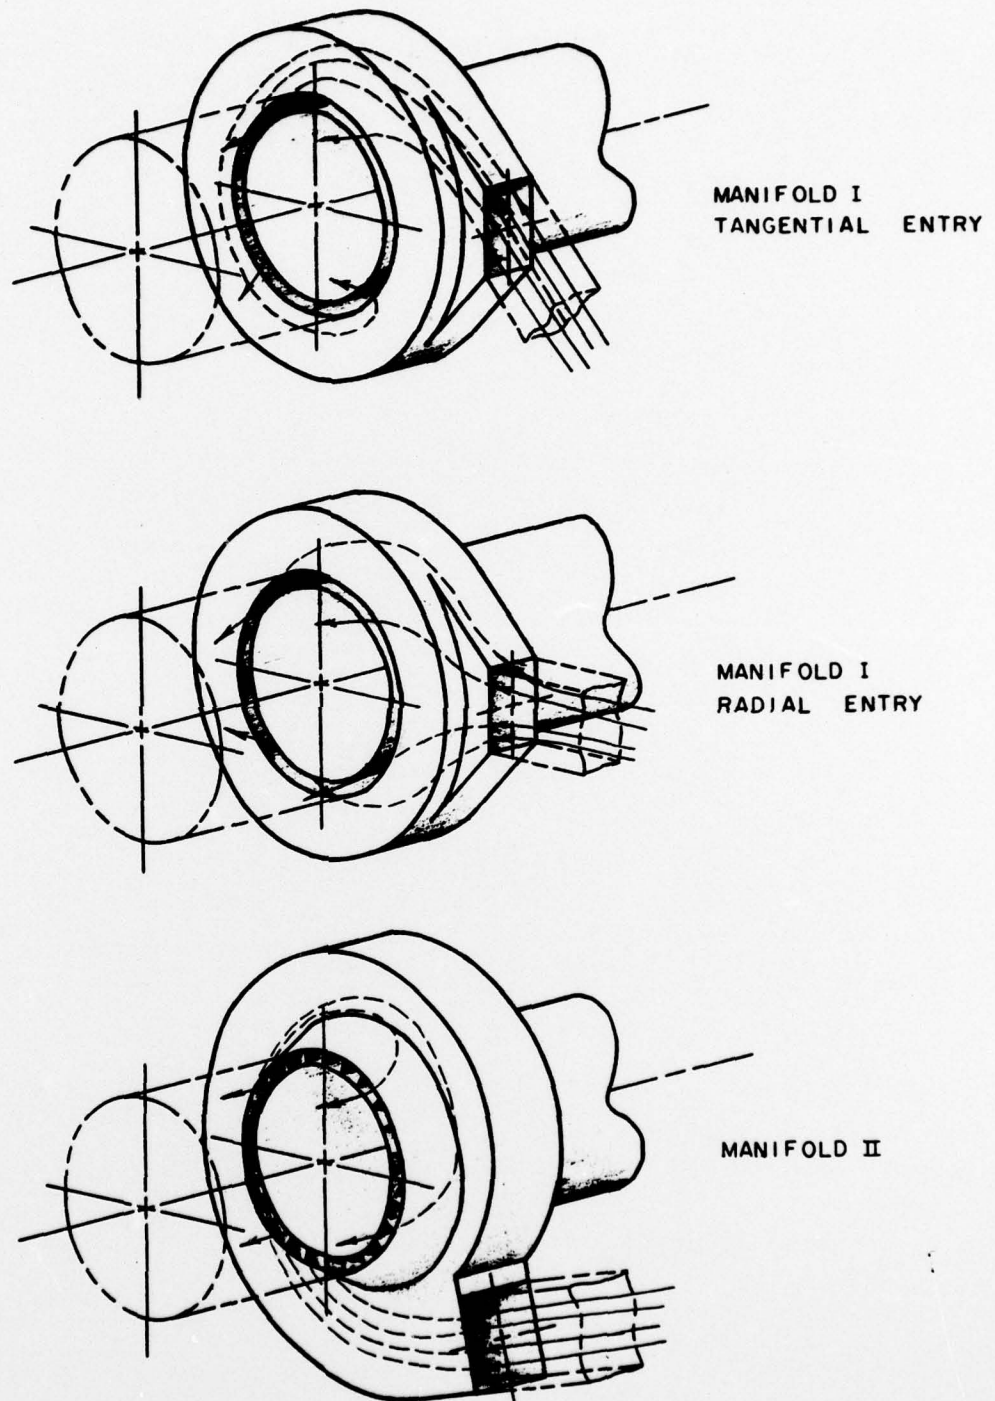


FIG. 2: MANIFOLD VARIATIONS

UNCLASSIFIED

UNCLASSIFIED

STN 417

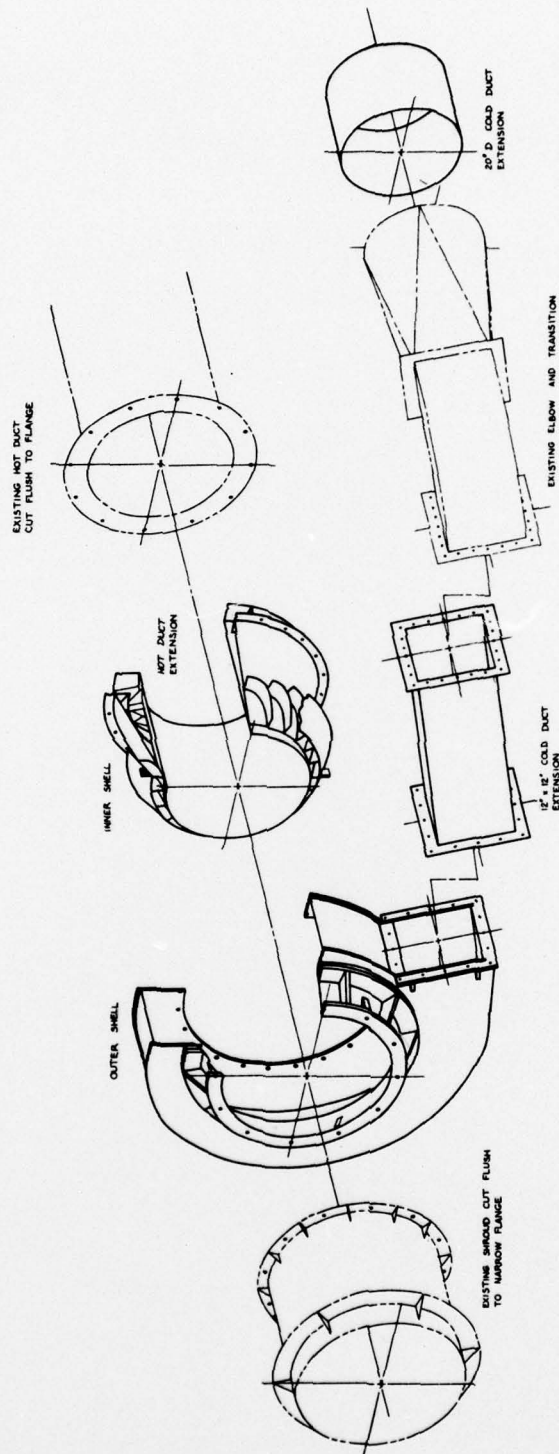


UNCLASSIFIED

FIG. 3. MANIFOLD II AND ASSOCIATED PARTS

STATION 417		STATION 417	
EXPLOSION STATION	SUPPLIED, ALBERTA	EXPLOSION STATION	SUPPLIED, ALBERTA
MANIFOLD II AND ASSOCIATED PARTS	MANIFOLD II AND ASSOCIATED PARTS	MANIFOLD II AND ASSOCIATED PARTS	MANIFOLD II AND ASSOCIATED PARTS
DATE	DATE	DATE	DATE
1976	1976	1976	1976
1976	1976	1976	1976

BEST AVAILABLE COPY

STN 417

UNCLASSIFIED

BEST AVAILABLE COPY

UNCLASSIFIED

STN 417

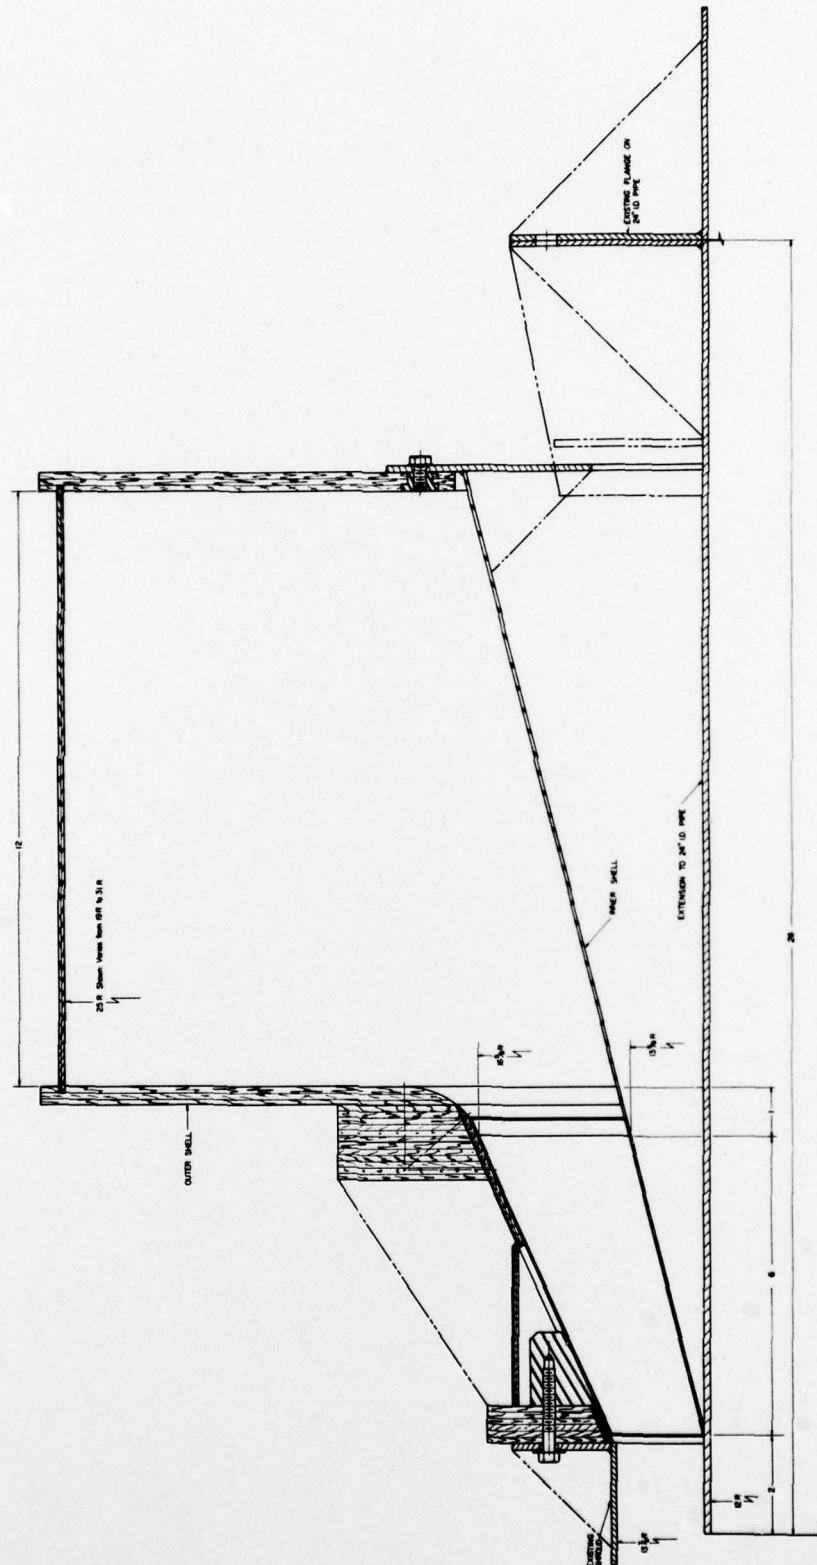


FIG. 5: SECTION THROUGH MANIFOLD II

UNCLASSIFIED

BEST AVAILABLE COPY

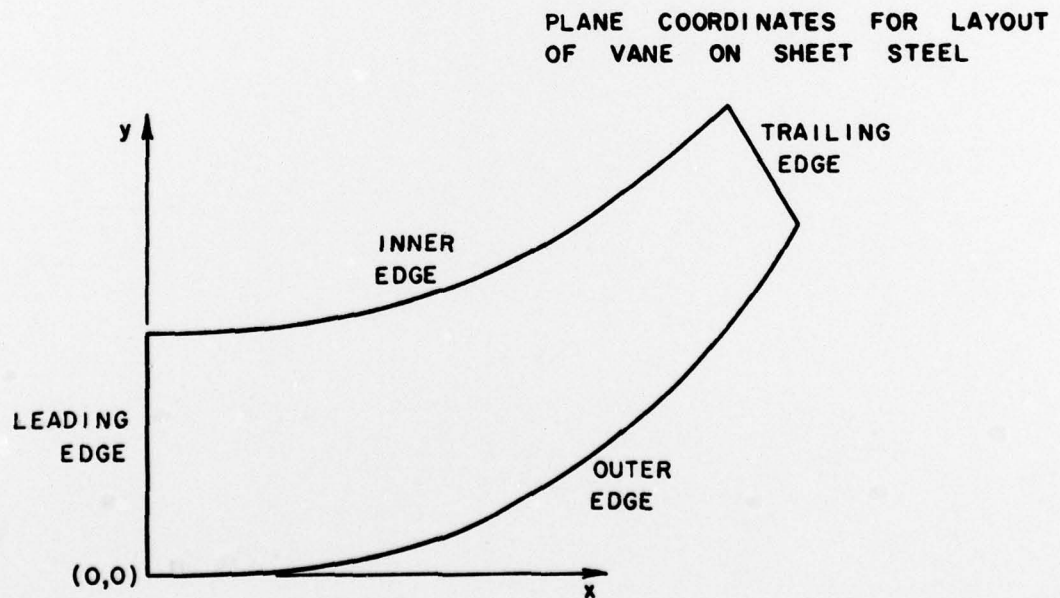
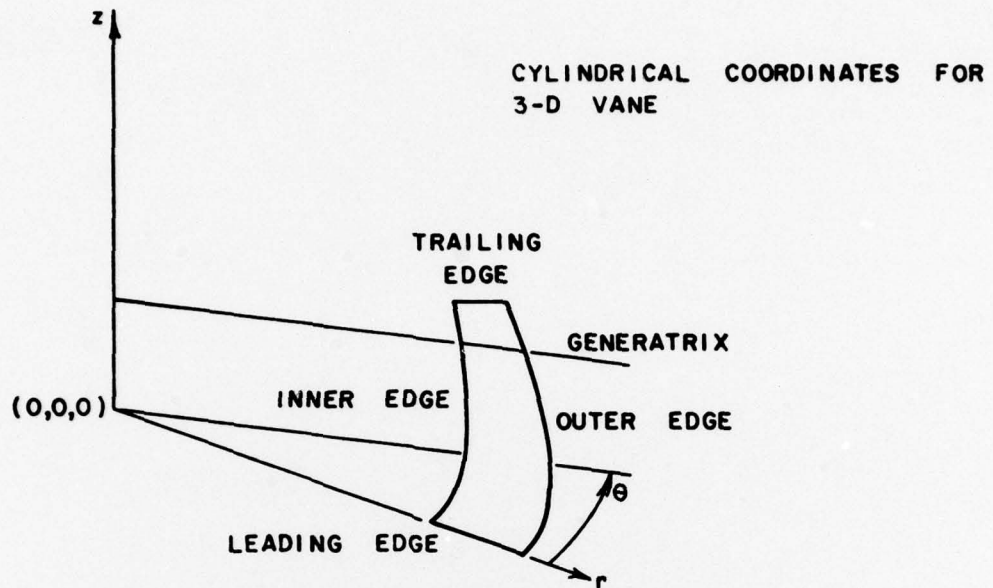


FIG. 6: COORDINATE DEFINITIONS



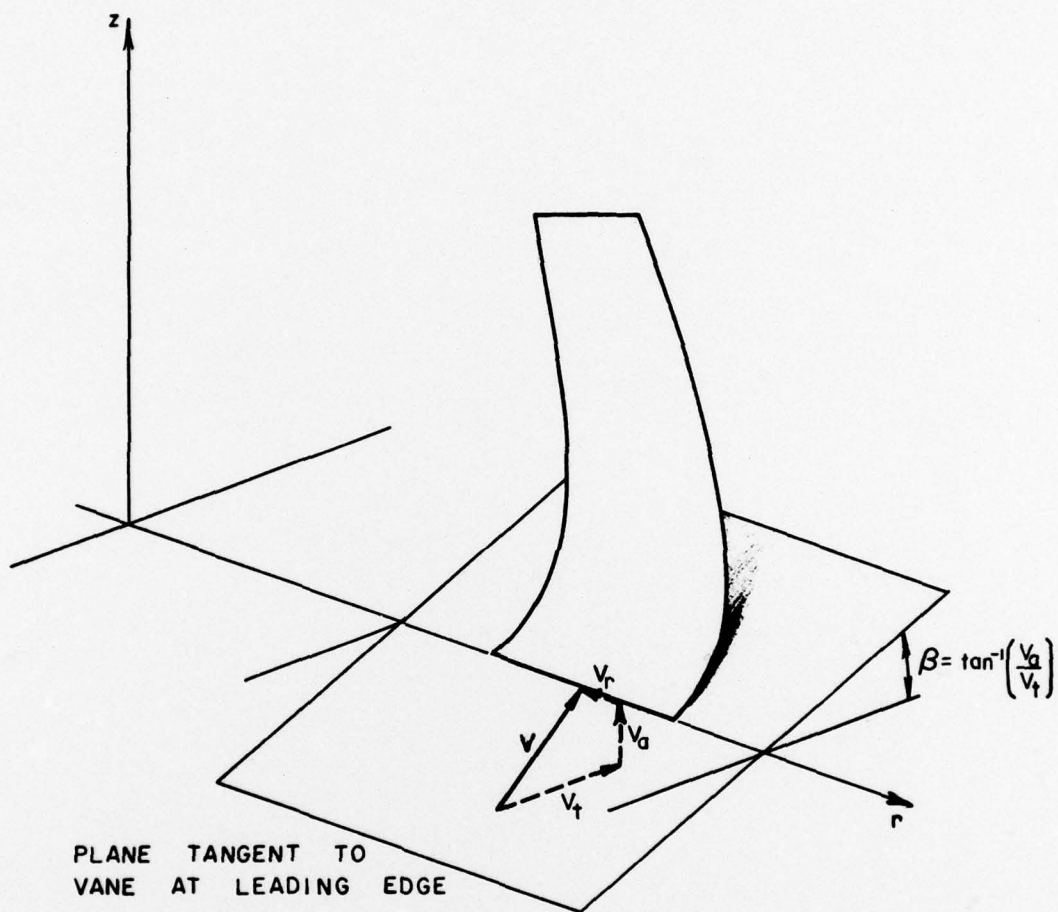


FIG. 7: LEADING EDGE TANGENT PLANE ANGLE

FIG. 8: CALCULATION OF v_o AND v_t


①

DRAW LEADING AND TRAILING
EDGE TANGENT LINES.

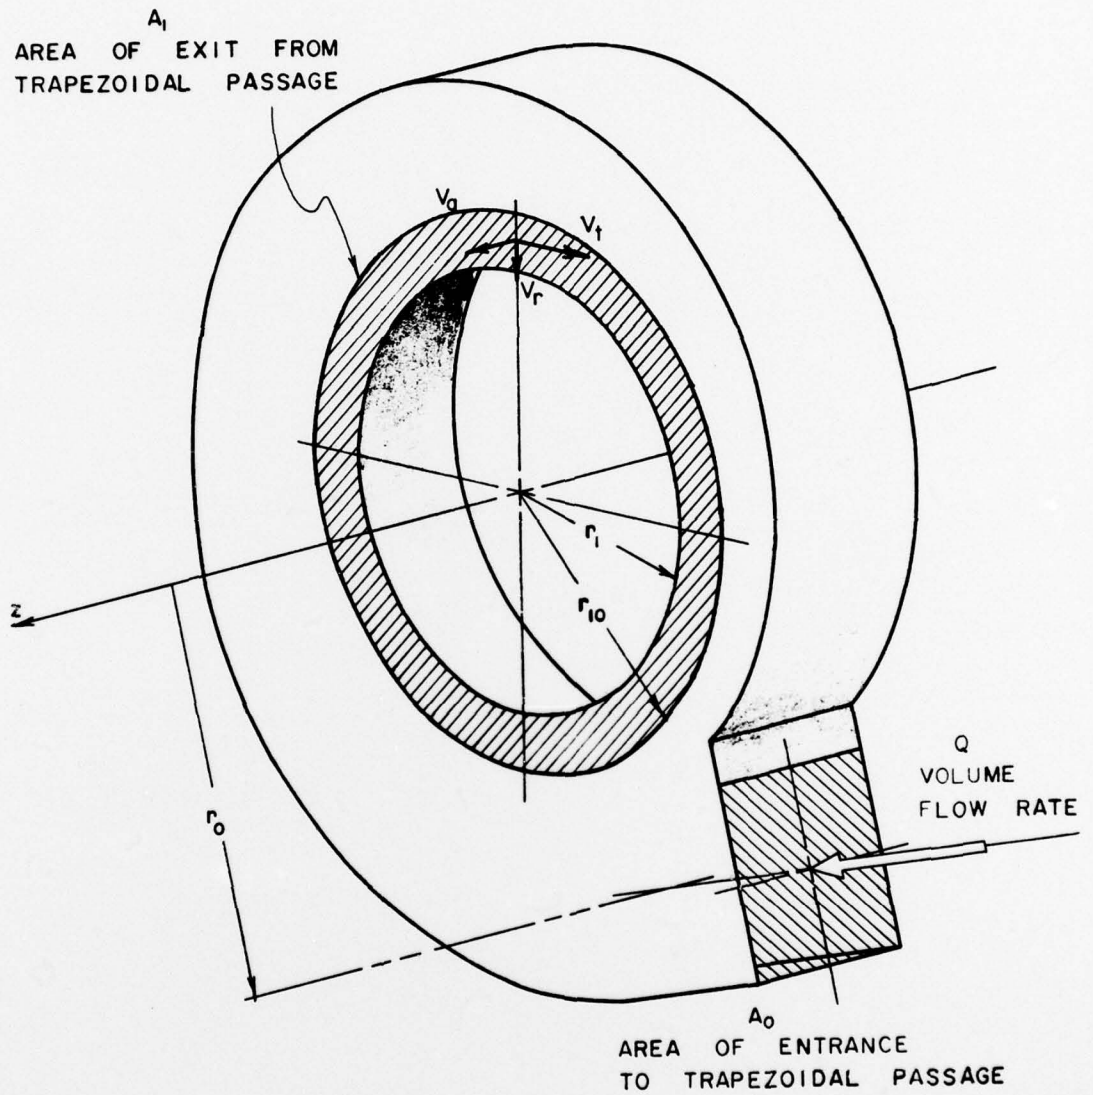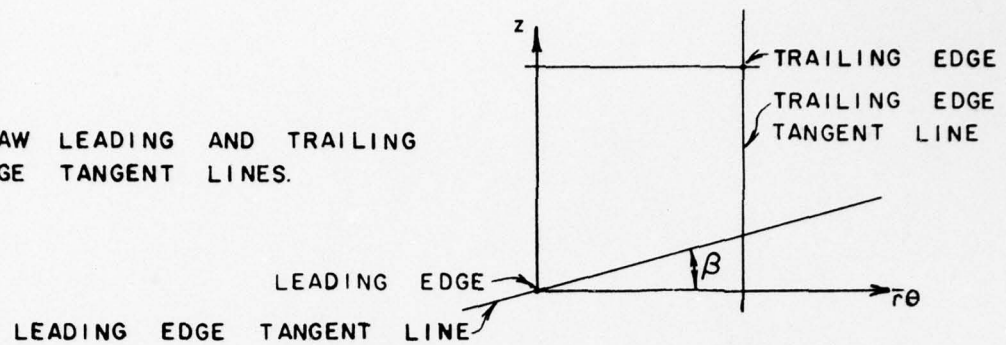


②

DIVIDE EACH LINE INTO
THE SAME NUMBER OF EQUAL
SEGMENTS.

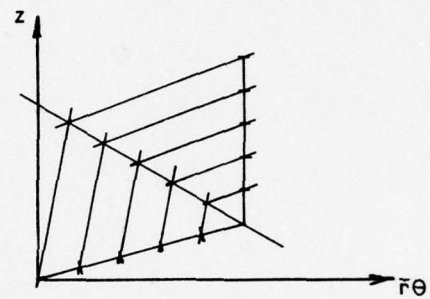


③

JOIN POINTS 2,2' 3,3' ETC.
DRAW TANGENT CURVE.

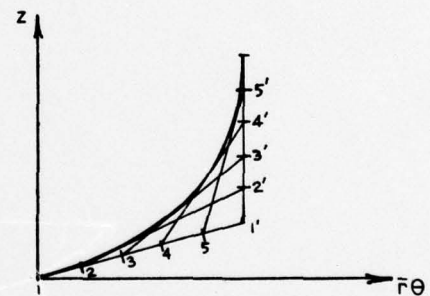

④

MEASURE Z AT REGULAR
INTERVALS OF θ .

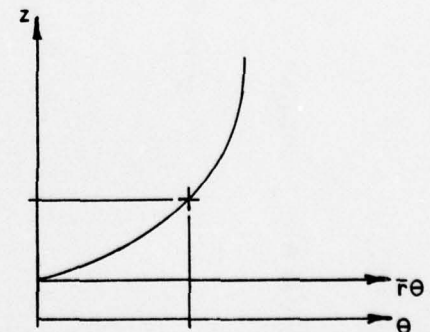FIG. 9: z VERSUS $\bar{r}\theta$

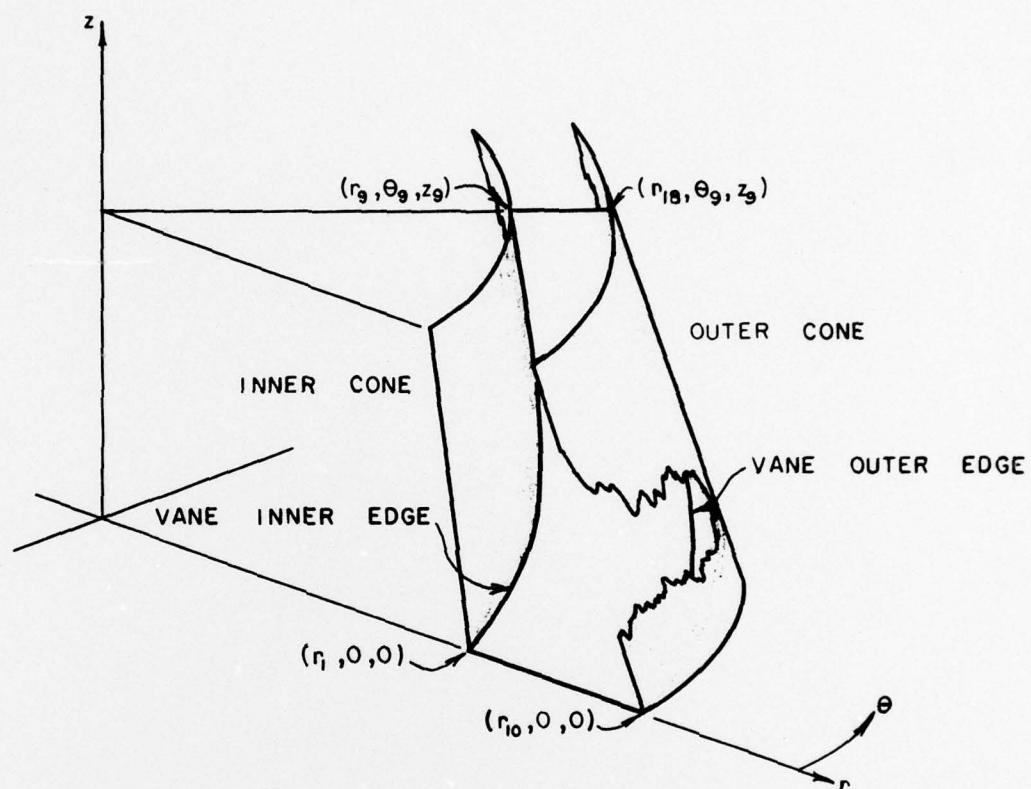


FIG. 10: INNER AND OUTER EDGES OF VANE

UNCLASSIFIED

STN 417

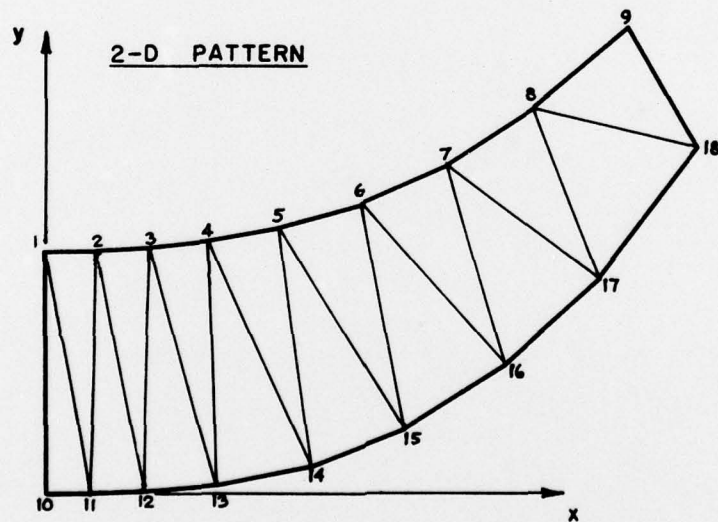
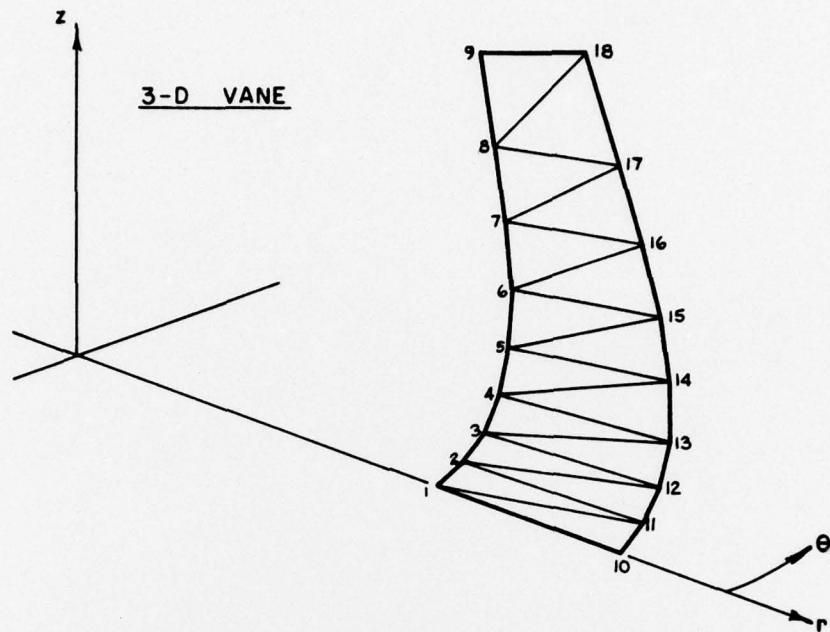


FIG. II: VANE COMPOSED OF TRIANGULAR ELEMENTS

UNCLASSIFIED

UNCLASSIFIED

STN 417

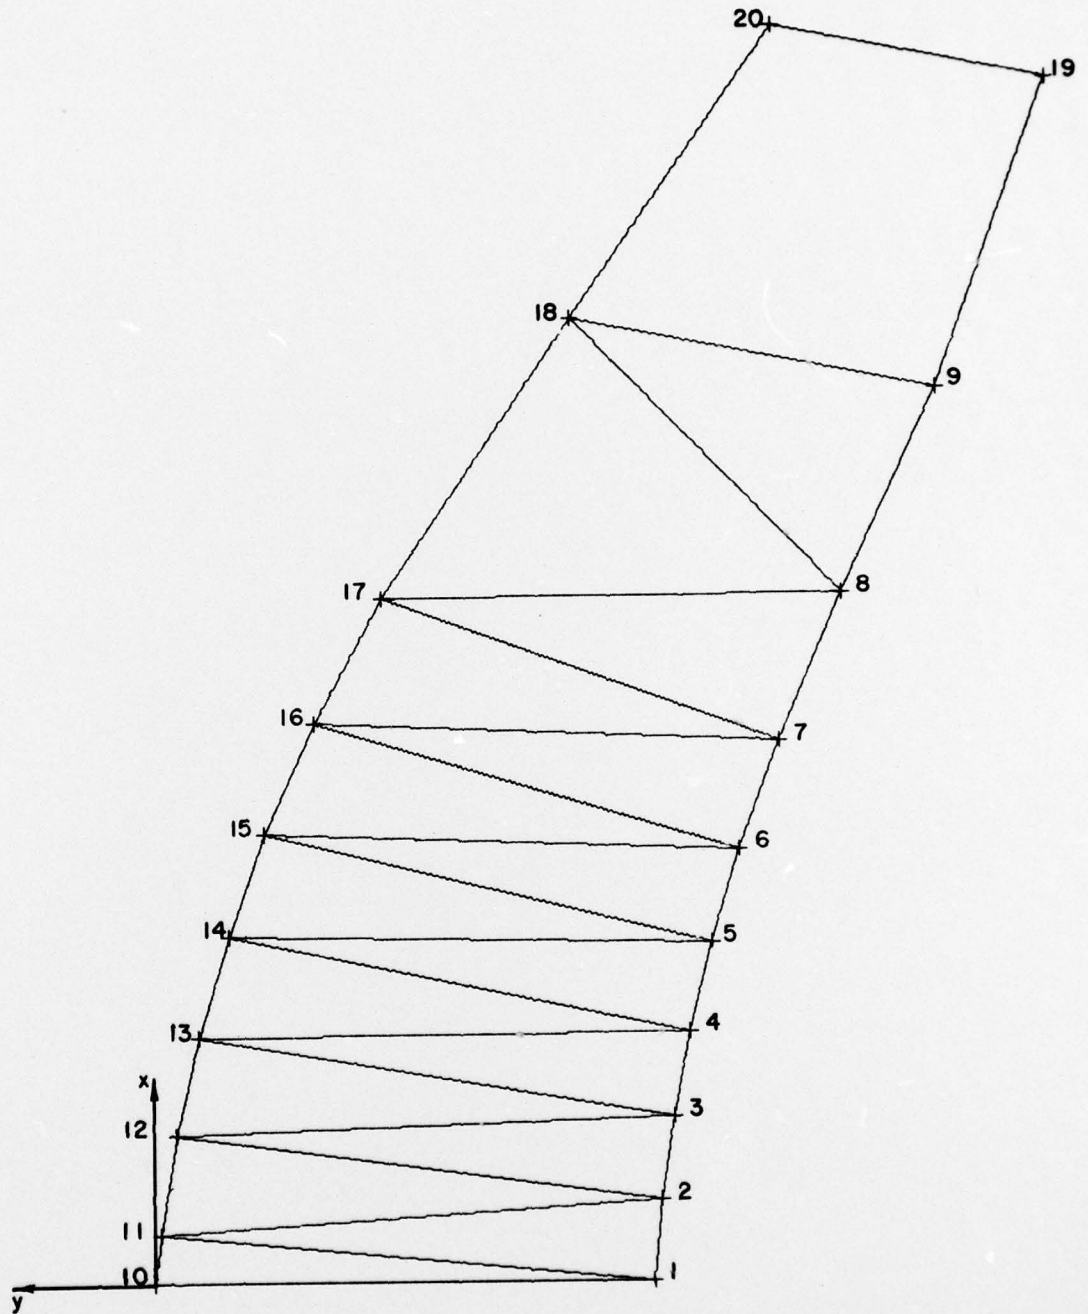


FIG. 12: FULL SCALE VANE PATTERN

UNCLASSIFIED

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall document is classified)		
1. ORIGINATING ACTIVITY DEFENCE RESEARCH ESTABLISHMENT SUFFIELD ✓		2a. DOCUMENT SECURITY CLASSIFICATION UNCLASSIFIED
		2b. GROUP
3. DOCUMENT TITLE DESIGN OF A COMPACT PLENUM CHAMBER FOR SUPPLY OF AIR TO AN ANNULAR SPACE WITH LOW ENERGY LOSSES (U)		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Technical Note		
5. AUTHOR(S) (Last name, first name, middle initial) Bayly, D.A.		
6. DOCUMENT DATE December 1977	7a. TOTAL NO. OF PAGES 27	7b. NO. OF REFS 1
8a. PROJECT OR GRANT NO. PCN 21K01	9a. ORIGINATOR'S DOCUMENT NUMBER(S) SUFFIELD TECHNICAL NOTE NO. 417 ✓	
8b. CONTRACT NO.	9b. OTHER DOCUMENT NO.(S) (Any other numbers that may be assigned this document)	
10. DISTRIBUTION STATEMENT UNLIMITED DISTRIBUTION		
11. SUPPLEMENTARY NOTES	12. SPONSORING ACTIVITY	
13. ABSTRACT This report describes the design of a compact plenum chamber the function of which is to receive air from a rectangular duct and deliver it to an annular space with low energy losses. Turning vanes formed from a single thickness of sheet steel ensure that air leaves the chamber essentially perpendicular to the plane of the annulus. A FORTRAN program is presented which plots the two dimensional development of the turning vane. (U)		

UNCLASSIFIED

Security Classification

KEY WORDS

Air Flow
Plenum Chambers
Vanes
FORTRAN
Plotting

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the organization issuing the document.
- 2a. **DOCUMENT SECURITY CLASSIFICATION:** Enter the overall security classification of the document including special warning terms whenever applicable.
- 2b. **GROUP:** Enter security reclassification group number. The three groups are defined in Appendix 'M' of the DRB Security Regulations.
3. **DOCUMENT TITLE:** Enter the complete document title in all capital letters. Titles in all cases should be unclassified. If a sufficiently descriptive title cannot be selected without classification, show title classification with the usual one-capital-letter abbreviation in parentheses immediately following the title.
4. **DESCRIPTIVE NOTES:** Enter the category of document, e.g. technical report, technical note or technical letter. If appropriate, enter the type of document, e.g. interim, progress, summary, annual or final. Give the inclusive dates when a specific reporting period is covered.
5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the document. Enter last name, first name, middle initial. If military, show rank. The name of the principal author is an absolute minimum requirement.
6. **DOCUMENT DATE:** Enter the date (month, year) of Establishment approval for publication of the document.
- 7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the document.
- 8a. **PROJECT OR GRANT NUMBER:** If appropriate, enter the applicable research and development project or grant number under which the document was written.
- 8b. **CONTRACT NUMBER:** If appropriate, enter the applicable number under which the document was written.
- 9a. **ORIGINATOR'S DOCUMENT NUMBER(S):** Enter the official document number by which the document will be identified and controlled by the originating activity. This number must be unique to this document.
- 9b. **OTHER DOCUMENT NUMBER(S):** If the document has been assigned any other document numbers (either by the originator or by the sponsor), also enter this number(s).
10. **DISTRIBUTION STATEMENT:** Enter any limitations on further dissemination of the document, other than those imposed by security classification, using standard statements such as:
 - (1) "Qualified requesters may obtain copies of this document from their defence documentation center."
 - (2) "Announcement and dissemination of this document is not authorized without prior approval from originating activity."
11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.
12. **SPONSORING ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring the research and development. Include address.
13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document, even though it may also appear elsewhere in the body of the document itself. It is highly desirable that the abstract of classified documents be unclassified. Each paragraph of the abstract shall end with an indication of the security classification of the information in the paragraph (unless the document itself is unclassified) represented as (TS), (S), (C), (R), or (U).

The length of the abstract should be limited to 20 single-spaced standard typewritten lines; 7 1/4 inches long.
14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a document and could be helpful in cataloging the document. Key words should be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context.